More choice, better quality – The EMC edge

Our DeckTOP Architectural Tiles provide the perfect combination of beauty, function, and ease of installation.

Tech Data

"Ron, once again you have delivered superior customer service."
Emily Bristow, Soft Play

Tile Top View

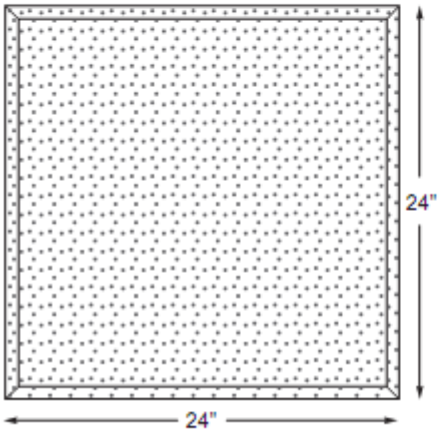

Tile Bottom View

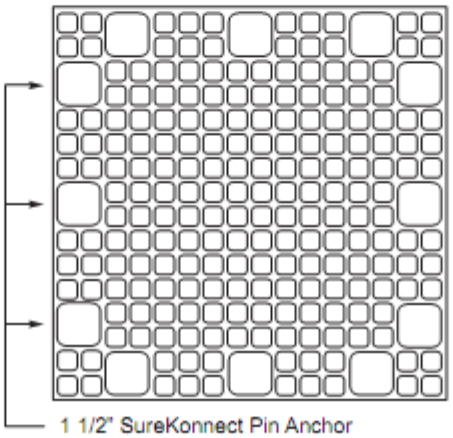

Tile Side View 1.375" thick

NOTE: Dimensions are 24" x 24" (+ or - 1/8")

Physical Properties

Test Description	ASTM	Result	Lab
Impact Attenuation	F1292	PASS	TUV
Slip Resistance	E303	Dry 96 Wet 47	SGS
Skid Resistance	D2047	.84	CASE
Tensile Strength	D412	162 PSI	St Louis
Tear Strength	D624	59.4 Lbs/Inch	St Louis
Elongation at Break	D412	102%	St Louis
Flammability - Roof	E108	Class A	SGS
Burning Pill	D2859	PASS	St Louis
Critical Radiant Flux	E648	Class II	SGS
ADA Accessibility	F1951	PASS	BDI
Durability	D3676	PASS	DTL

Tile Dimensions

Thickness	Weight per Tile	Pieces Per Pallet	Pallets Per Truck
1.375" Tile	21.00 lbs	100	20
1.375" Ramp	10.00 lbs	200	22

Color Chart



Black | Blue | Red | Gray | Earth | Green | Green Fields | Starburst | Purple Mountain | Confetti | Fiesta | Hawaiian Sand

ENVIRONMENTAL MOLDING CONCEPTS

14050 Day Street
Moreno Valley, CA 92553
(888) 836-2665
www.EMCMolding.com

Better Quality, More Choice

The EMC EDGE